









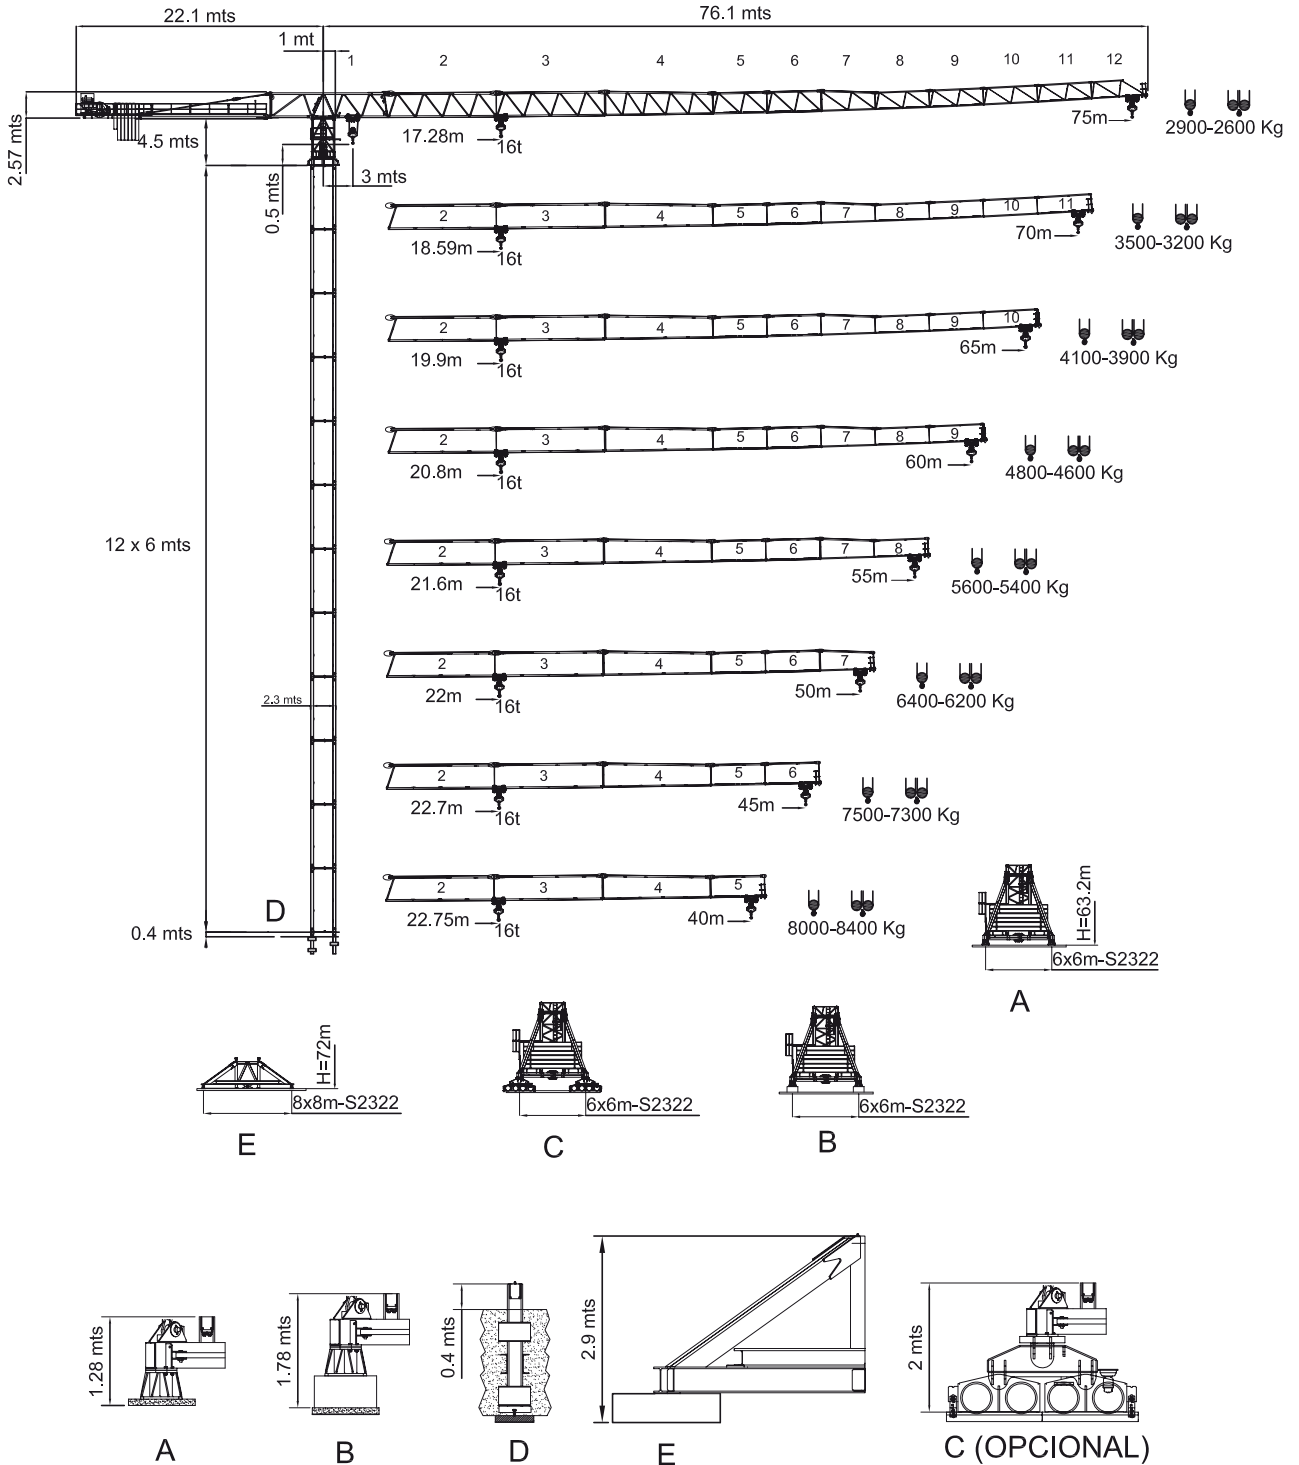

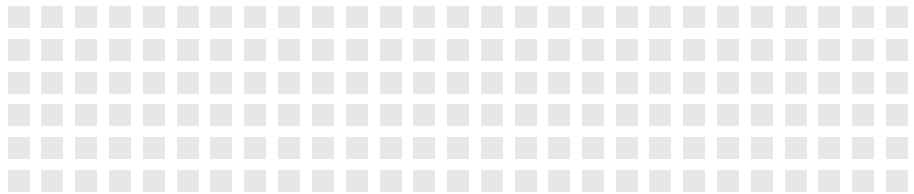







# TLS 75 16T






Curvas de cargas- Load diagrams- Lastkurven- Courbes de charges- Curve di carico  
График грузоподъёмности


75 m 	10	15	20	25	30	32.5	35	40	45	50	55	60	65	70	75	m	
	8000	8000	8000	8000	8000	8000	7347	6292	5477	4829	4300	3861	3491	3174	2900	Kg	
	10	15	18	20	25	31.4	35	40	45	50	55	60	65	70	75	m	
	8000	8000	8000	8000	8000	8000	7047	5992	5177	4529	4000	3561	3191	2874	2600	Kg	
	10	15	17.2	20	25	30	35	40	45	50	55	60	65	70	75	m	
16000	16000	16000	13542	10475	8466	7047	5992	5177	4529	4000	3561	3191	2874	2600	Kg		
70 m 	10	15	20	25	30	35	35.1	40	45	50	55	60	65	70	m		
	8000	8000	8000	8000	8000	8000	8000	6869	5989	5288	4717	4242	3842	3500	Kg		
	10	15	18	20	25	33.9	35	40	45	50	55	60	65	70	m		
	8000	8000	8000	8000	8000	8000	7709	6569	5689	4988	4417	3942	3542	3200	Kg		
	10	15	18.5	20	25	30	35	40	45	50	55	60	65	70	m		
16000	16000	16000	14726	11413	9241	7709	6569	5689	4988	4417	3942	3542	3200	Kg			
65 m 	10	15	20	25	30	35	36.9	40	45	50	55	60	65	m			
	8000	8000	8000	8000	8000	8000	8000	7292	6364	5624	5022	4522	4100	Kg			
	10	15	18	20	25	35	36.4	40	45	50	55	60	65	m			
	8000	8000	8000	8000	8000	8000	8000	7156	6209	5455	4841	4331	3900	Kg			
	10	15	19.9	20	25	30	35	40	45	50	55	60	65	m			
16000	16000	16000	15932	12367	10031	8382	7156	6209	5455	4841	4331	3900	Kg				
60 m 	10	15	20	25	30	35	38.7	40	45	50	55	60	m				
	8000	8000	8000	8000	8000	8000	8000	7713	6736	5959	5326	4800	Kg				
	10	15	18	20	25	35	38.1	40	45	50	55	60	m				
	8000	8000	8000	8000	8000	8000	8000	7564	6570	5780	5135	4600	Kg				
	10	15	20	20.8	25	30	35	40	45	50	55	60	m				
16000	16000	16000	16000	13029	10579	8850	7564	6570	5780	5135	4600	Kg					
55 m 	10	15	20	25	30	35	40	40.4	45	50	55	m					
	8000	8000	8000	8000	8000	8000	8000	8000	7073	6261	5600	Kg					
	10	15	18	20	25	35	39.7	40	45	50	55	m					
	8000	8000	8000	8000	8000	8000	8000	7931	6895	6071	5400	Kg					
	10	15	20	21.6	25	30	35	40	45	50	55	m					
16000	16000	16000	16000	13625	11072	9271	7931	6895	6071	5400	Kg						
50 m 	10	15	20	25	30	35	40	41.1	45	50	m						
	8000	8000	8000	8000	8000	8000	8000	8000	7227	6400	Kg						
	10	15	18	20	25	35	40	40.3	45	50	m						
	8000	8000	8000	8000	8000	8000	8000	8000	7039	6200	Kg						
	10	15	20	22	25	30	35	40	45	50	m						
16000	16000	16000	16000	13888	11290	9456	8092	7039	6200	Kg							
45 m 	10	15	20	25	30	35	40	42.5	45	m							
	8000	8000	8000	8000	8000	8000	8000	8000	7500	Kg							
	10	15	18	20	25	35	40	41.6	45	m							
	8000	8000	8000	8000	8000	8000	8000	8000	7300	Kg							
	10	15	20	22.7	25	30	35	40	45	m							
16000	16000	16000	16000	14367	11686	9794	8387	7300	Kg								
40 m 	10	15	20	25	30	35	40	m									
	8000	8000	8000	8000	8000	8000	Kg										
	10	15	18	20	25	35	40	m									
	8000	8000	8000	8000	8000	8000	Kg										
	10	15	20	22.7	25	30	35	40		m							
16000	16000	16000	16000	14388	11703	9809	8400	Kg									



FEM 1005-C25 / EN 14439- Mástil / Reacciones- Masts / Reactions- Mast / Eckdrücke- Mat / Réactions- Torre / Réazioni / Реакции - Комплектация башни

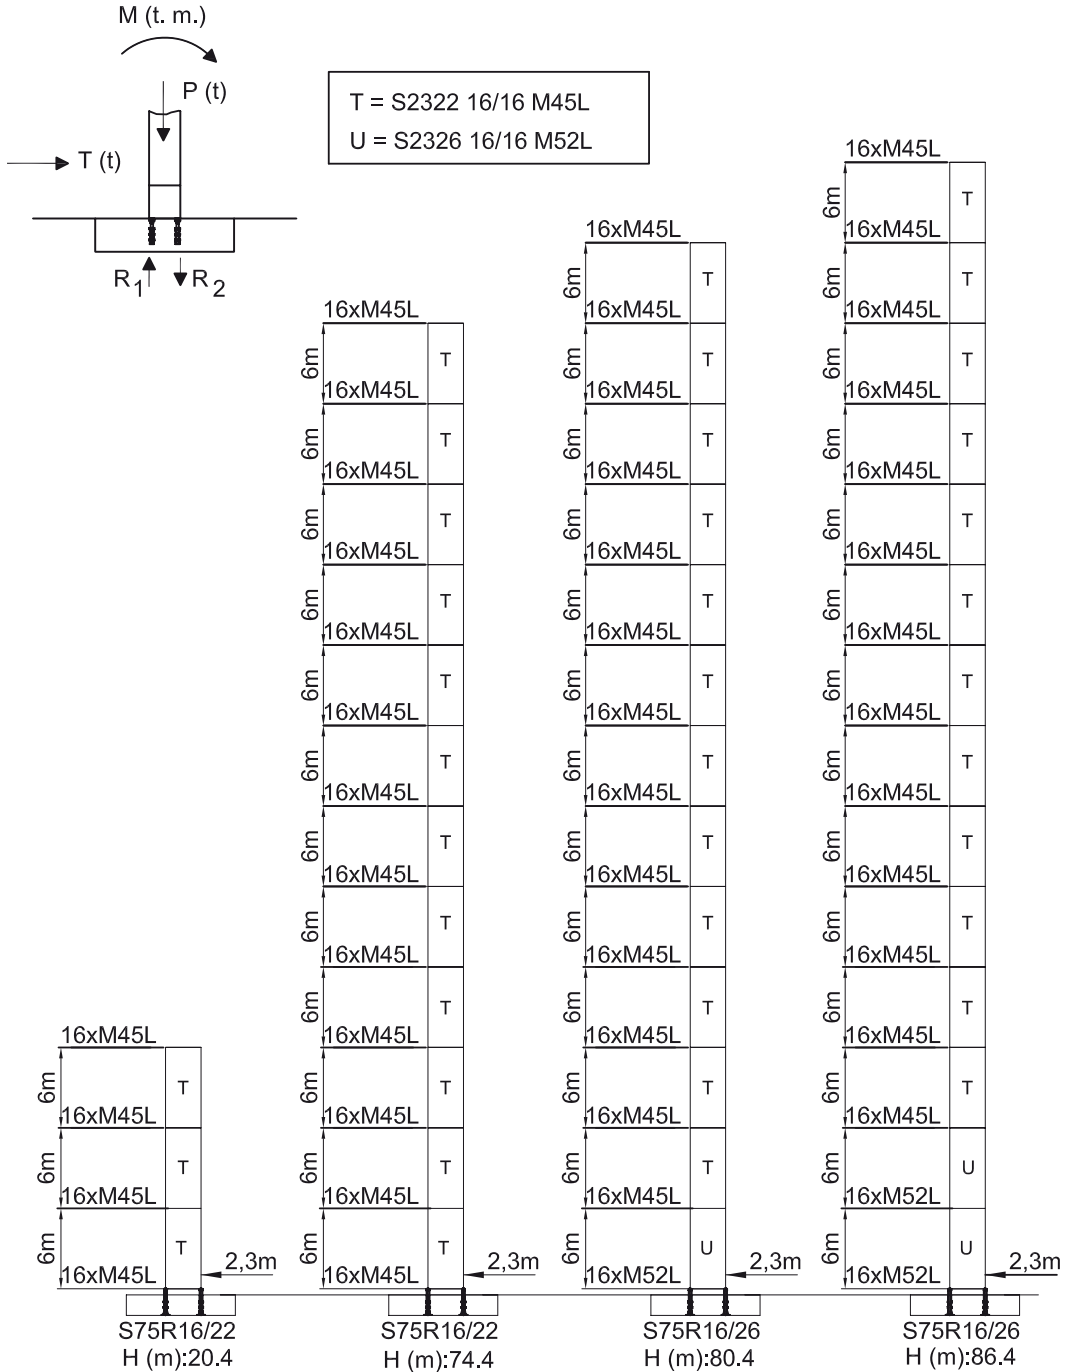



H (m)	20.4	38.4	50.4	62.4	74.4	80.4	86.4
M (T-m)	365.8	491	665.5	872.5	1112	-	--
T (t)	11	14.7	18.6	22.5	26.6	-	--
P (t)	92.4	96.3	105.5	113	125.1	-	--
R <sub>1</sub> (t)	102	145.3	203.2	272.7	352.3	-	--
R <sub>2</sub> (t)	-150.4	-193.4	-256	-329.2	-414.8	-	--

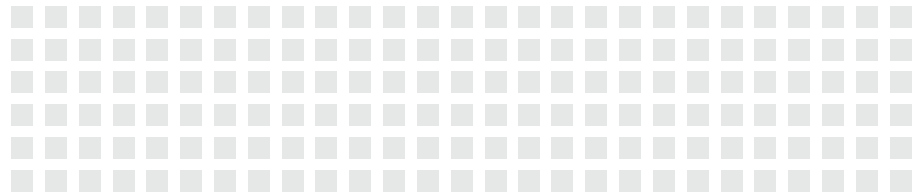


# TLS 75 16T

Proceso de trepado- External climbing- Kletterkrane- Telescopable- Sopralzo idraulico - Процесс наращивания крана

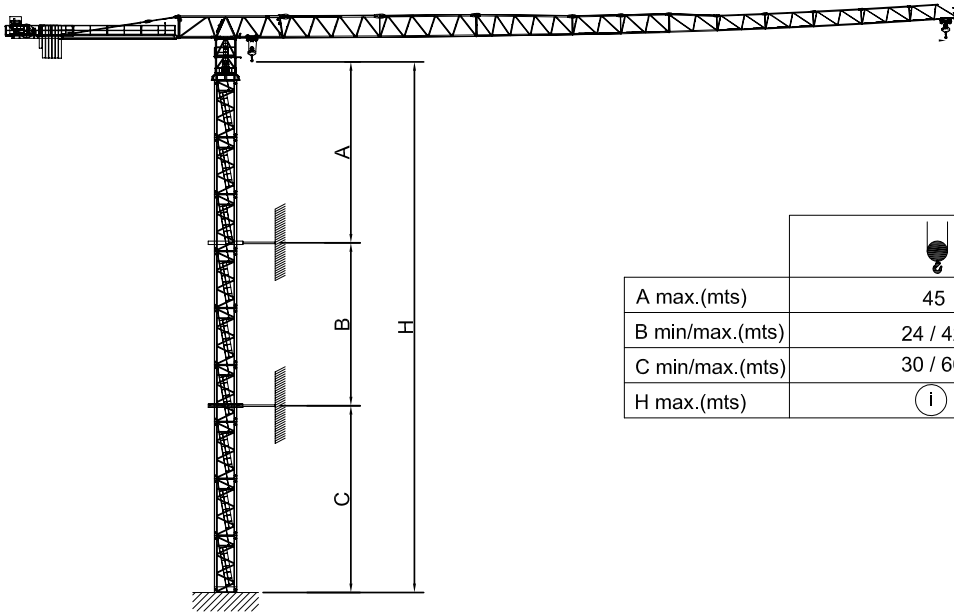


	
A max.(mts)	45
B min/max.(mts)	24 / 42
C min/max.(mts)	30 / 60
H max.(mts)	(i)

Proceso de trepado- Internal climbing- Kletterkrane- Telescopable- Sopralzo idraulico- Процесс наращивания крана

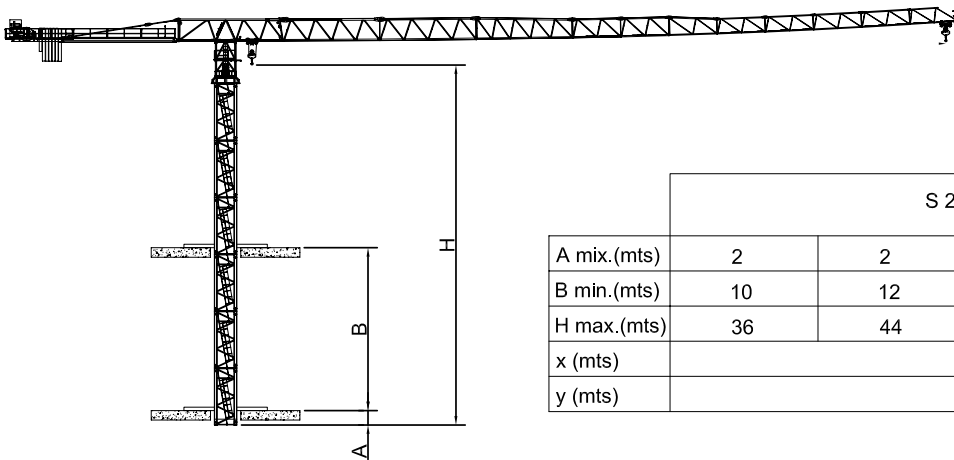









	S 23 22			
A mix.(mts)	2	2	2	2
B min.(mts)	10	12	14	16
H max.(mts)	36	44	50	54
x (mts)	3			
y (mts)	2.5			




(i)











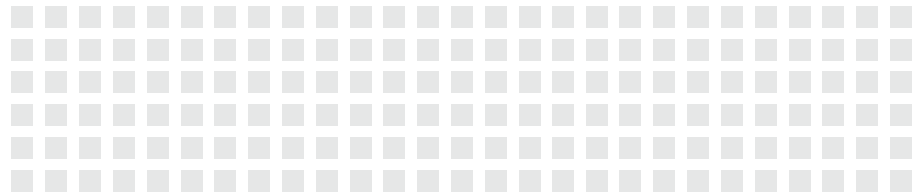

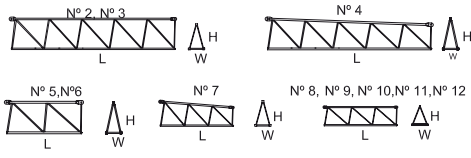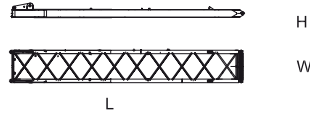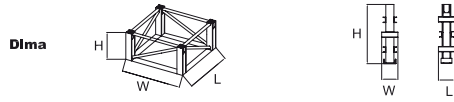

Consultarnos-Consultateci-Consult us-Nous consulter-Auf anfrage  
Другие высоты подъема и наращивание крана по запросу

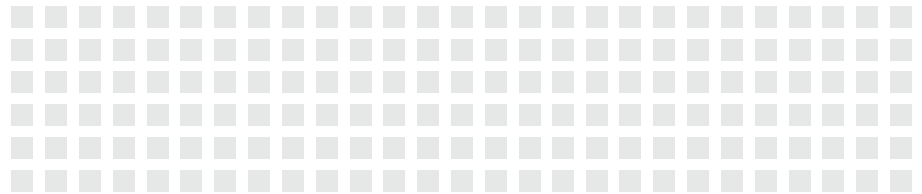







	L(m)	W(m)	H(m)	Peso(Kg)	
<b>Pluma tramo primero</b> / Jib heel section / Ausleger-Anlenkstück / Pied de fleche / Settore articolato di braccio / Корневая секция стрелы 	11,3	1,89	2,48	8200	
<b>Elemento intermedio de pluma</b> / Intermediate jib section / Ausleger-Zwischenstück / Elément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	2 3 4 5 6 7 8 9 10 11 12	10,45 10,4 10,3 5,3 5,3 5,26 5,25 5,21 5,18 5,15 5,11	1,65 1,65 1,65 1,65 1,65 1,65 1,65 1,65 1,65 1,65 1,65	2,45 2,42 2,37 2,07 2,07 2,02 1,67 1,67 1,65 1,65 1,6	3620 2770 2300 1035 890 765 690 570 460 340 290
<b>Gancho, Carro y Puntera</b> / Hook, Trolley and jib head / Lasthaken - Laufkatze-Cabeça de Lança / Crochet - Chariot-Pointe de fleche / Gancio - Carrello e Punta freccia / Крюк - Грузовая тележка 	2,62 1,24 0,7	1,76 0,64 1,9	1,41 1,75 1,3	430 750 160	
<b>Contrapluma 1</b> / Counter-jib / Gegenausleger / Contre-fleche / Controbraccio / Консоль противовеса 	11,94	1,66	0,75	2750	
<b>Contrapluma 2</b> / Counter-jib / Gegenausleger / Contre-fleche / Controbraccio / Консоль противовеса 	5,55	1,75	0,83	2220	
<b>Elemento de empotre</b> / Foundation anchor / Fundamentanker / Pieds de scellement / El anegare / Анкерное крепление 	S75R16/22 S75R16/26 DIMA	0,5 0,5 2,31	0,5 0,5 2,34	2 2,4 0,8	2840 3160 1650
<b>Bloque de contrapeso</b> / Counterweight blocks / Gegengewichtsblöcke / Bloc de contrepoids / Blocco di contrappeso / Плита противовеса 	A B	3,4 2,4	1,55 1,55	0,29 0,29	3500 2500



# TLS 75 16T

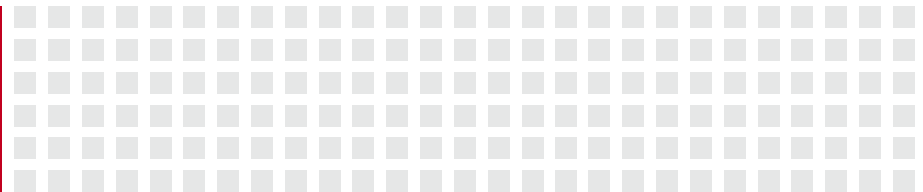	L(m)	W(m)	H(m)	Peso(Kg)	
<b>Base 6X6-2.3-S2322</b> / Crossbase 6x6 / Fundamentkreuz 6x6 / Châsis 6x6 / Carro base 6x6 / Опорная рама крестовина					
	9	0.72	0.83	2604	
	4.38	0.67	0.83	930	
	5.38	0.28	0.28	560	
	6	2.27	2.29	5900	
	0.65	0.65	0.45	315	
<b>Bloque lastre de base 6x6</b> / Base ballast block / Grundballastblöcke / Bloc de lest de base / Blocco di zavorra alla base / Плита балласта опорной рамы	A	5.8	1.5	0.43	8000
	B	4	1.5	0.43	4900
	C	3.5	1.5	0.43	4200
					
<b>Base 8X8-2.3-S2322</b> / Crossbase 8x8 / Fundamentkreuz 8x8 / Châsis 8x8 / Carro base 8x8 / Опорная рама крестовина					
	5.9	1.8	2.5	2980	
	5.24	1.8	2.5	2590	
	5.9	0.27	0.29	972	
	3.17	0.11	0.29	116	
					
<b>Bloque lastre de base 8x8</b> / Base ballast block / Grundballastblöcke / Bloc de lest de base / Blocco di zavorra alla base / Плита балласта опорной рамы	1.94	2	0.35	3000	
					

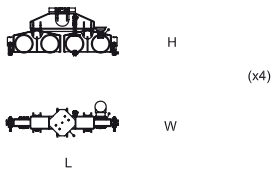

	L(m)	W(m)	H(m)	Peso(Kg)
<b>Traslacion</b> / Travelling bogies / Kranfahren / Traslacion / Traslazione / Рельсовый ход 	2.94	1.25	0.97	3102
<b>Equipo de elevacion</b> / Hoist winch / Heben / Levage / Sollevamento / Механизм подъема 	2	2.1	2	3100
<b>Elemento de torre S23</b> / Tower section S23 / Turmstück S23 / Élément de mât S23 / Elemento di torre S23 / Секция башни S23 	T 6 U 6	2.27 2.31	2.29 2.34	4650 6198
<b>Cabina y soporte</b> / Cabin and platform / Kabine und wartungs / Cabine et support / Cabina e supporto / Кабина с основой 	3.43	1.54	2.36	1000
<b>Unidad de rotacion</b> / Complete slewing unit / Drehbühne / Orientation / Rotazione / Поворотная платформа 	2.22 2.98	1.64 2.39	3.28 1.93	1900 9000

DECLINAMOS TODA RESPONSABILIDAD DERIVADA DE LA INFORMACION PROPORCIONADA.  
 This information is supplied without liability.  
 Sämtliche Angaben erfolgen ohne Gewähr.  
 Ces renseignements sont sans garantie.  
 Le indicazioni contenute si intendono salvo errori ed omissioni.

ESPECIFICACIONES SUJETAS A MODIFICACIONES SIN PREVIO AVISO.  
 Specifications subject to modification without notice.  
 Obiges kann ohne berstaendigung geaendert werden.  
 Specifications susceptibles de modification sans avis préalable.  
 Specifiche suscettibili di variazioni senza preavviso

**TLS 75 16T**